


KEY FEATURES

- ▶ Made to Energy NSW Specifications
- ▶ Suitable for Single Phase & Three Phase Applications
- ▶ IP23 Rated Meter Enclosure
- ▶ Cable Management Tie off Point and Lead Entry Protection AS/NZS 3000:2018
- ▶ 570 X 560 X 6mm Pre-drilled Double Hinged Meter Panel
- ▶ Door Open Strap for Easy Installation and Maintainence
- ▶ Safe 4X Ingress Protection Flanges Rear of Panel
- ▶ Panel Support Ramp for Installation Ease and Panel Sag Prevention
- ▶ 75mm Behind Meter Panel
- ▶ Knockouts Rear and Base for Convenient Cable Access
- ▶ Available with 12 or 18 Pole Surface Mount Din Rail Enclosure
- ▶ Made with Australian-Made Galvanized G2 Z275 AS/NZS 1397:2021
- ▶ Long-lasting Custom Made Australian Hinges
- ▶ Australian Moulded Plastic Safety Components
- ▶ Suitable as Construction Site Switchboard with Regulated Safety Features

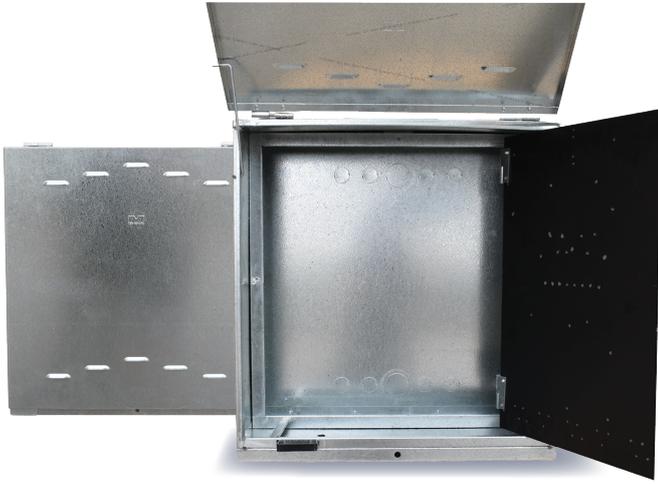

Technical Specifications

Specifications	Width	Height	Depth
MAU60	600 mm	600 mm	250 mm
Meter Panel	570 mm	560 mm	6 mm

Order Code	Name	Meter Isolator	Quantity
MAU 60	600mm x 600mm x 250mm Single Two Meter	▶ 600mm x 600mm x 250mm Single Two Meter	24
			1

Available Accessories

Order Code	Occupancy	Width (mm)	Height (mm)	Depth (mm)	Quantity
PME12	▶ 12 Pole Surface Mount Din Rail Enclosure	160	260	60	10
PME18	▶ 18 Pole Surface Mount Din Rail Enclosure	160	365	60	10