

TEMPORARY SITE POWER BOARDS




KEY FEATURES

- ▶ Fully compliant with AS/NZS3012
- ▶ Fully wired and labeled versions available
- ▶ Fits up to 9 X double GPO's
- ▶ Strong and sturdy two piece stand with bolt down provisions
- ▶ Option for 3 phase outlet with or without mechanical protection
- ▶ IP23 Constructed from galvanised 1.2mm steel - Powdercoated High Visibility Yellow



PRODUCT DATASHEET

Temporary Power Boards

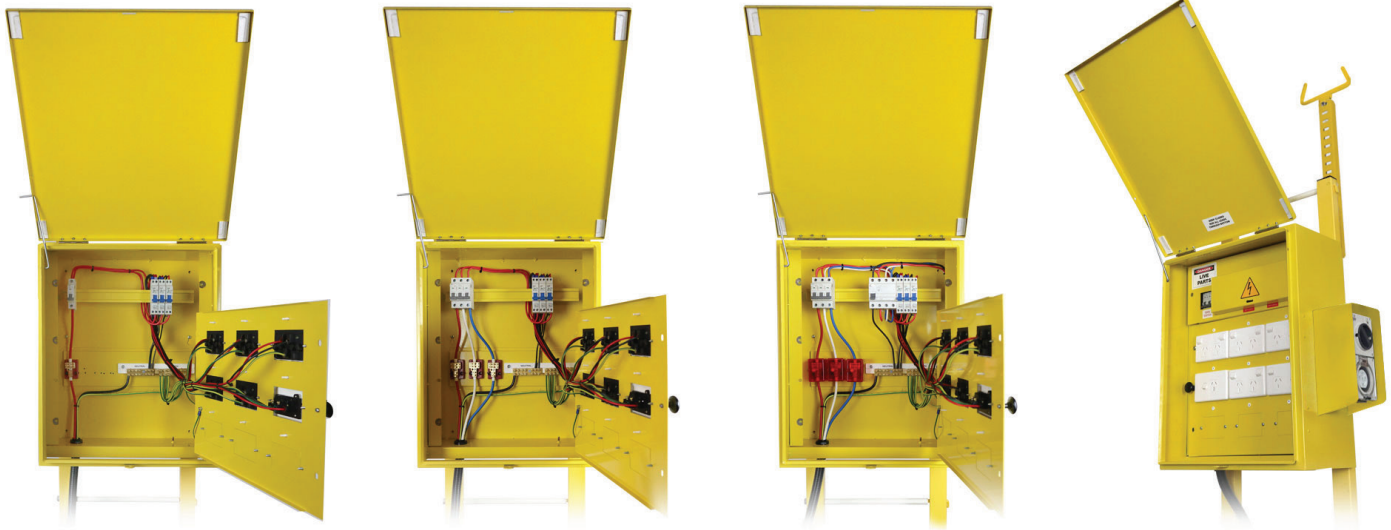

Code	Description	Width (mm)	Height (mm)	Depth (mm)
TPB-44 BOX ONLY	▶ Temporary Power Board - Box Only	445	550	230
TPB-44 STAND	▶ Temporary Power Board - 2 Piece Stand Only	445	1800	700

Code	Description
TPB-PW32A 1P	▶ Temporary Power Board including stand - Prewired 32A 1P with 3 X 10A Twin Double Pole & 1 X 15A Double Pole Power Points. Has capacity for up to 9 twin 1P Power Points. IP23
TPB-PW63A 1P	▶ Temporary Power Board including stand - Prewired 63A 1P with 5 X 10A Twin Double Pole & 1 X 15A Double Pole Power Points. Including active link for incoming 25mm and 3 out going cables up to 16mm. Has capacity for up to 9 twin 1P Power Points. IP23
TPB-PW63A 3P	▶ Temporary Power Board including stand - Prewired 63A 3P for even distributed single phase across 3 phases with 5 X 10A Twin Double Pole & 1 X 15A Double Pole Power Points. Including 3 active links for incoming 25mm and 3 out going cables up to 16mm. Has capacity for up to 9 twin 1P Power Points. IP23
TPB-PW63A 3P OUTLET	▶ Temporary Power Board including stand - Prewired 63A 3P for even distributed single phase across 3 phases with 5 X 10A Twin Double Pole & 1 X 15A Double Pole Power Points. One 5 pin external IP56 3P Outlet. Including 3 active links for incoming 25mm and 3 out going cables up to 16mm. Has capacity for up to 9 twin 1P Power Points. IP23

Accessories	Description
TPB-STAND	▶ Temporary Power Board Two Piece Stand Only 1800mm height with insulated cable tie rods top and bottom. Suited for 445 wide X 550 high X 230 Deep Temporary Power Board.
TPB-CABLE HOOK	▶ Over head Insulated Cable Hook to support incoming and outgoing cables to an additional height of up to 2100mm.
TPB-TRAY	▶ 3P Fold Away Service Tray for safe charging of battered power tools
TPB-3P PROTECTION	▶ External power point guard to provide mechanical protection for the outlet.